

► MVS-3600 SERIES POSITIVE OPENING MICRO SWITCHES

1. Features / 功能 :


- a. Performance according to standards --- VDE0660, IEC/EN 60947-5-1, UL508. / 功能遵照歐規及美規系統製造。
- b. Positive opening contact with sealed wire outlet. / 強制脫離接點與密封型出線。
- c. Oil-water resistant for IP67. and strong housing protection. / IP67 防油防水等級與強韌的保護外殼



2. Rating / 額定值

10A , 250VAC
AC-15 , 230VAC/1.5A
DC-13 , 24VDC/2.0A

3. Circuitry/ 電氣回路

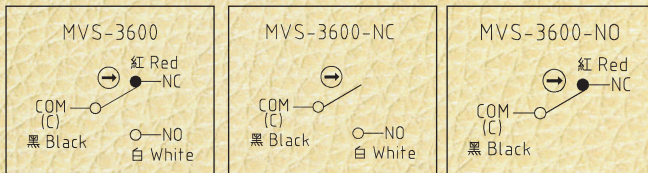


● MVS-3600 ● MVS-3600-NC ● MVS-3600-NO

4. CHARACTERISTICS / 特性

Operation speed	0.01 to 1m/sec
Operation frequency	60 operations/min
Contact resistance	30 mΩ
Dielectric strength	1000VAC, 50/60Hz for 1 minute between non-continuous terminals.
Operating temperature	At -40°C ~ +80°C
Storage humidity	85% RH Max.
Service life	Mechanically: 5,000,000 operations Min.
	Electrically: 50,000 operations Min.
Protection degree	IP67

5. 成品圖

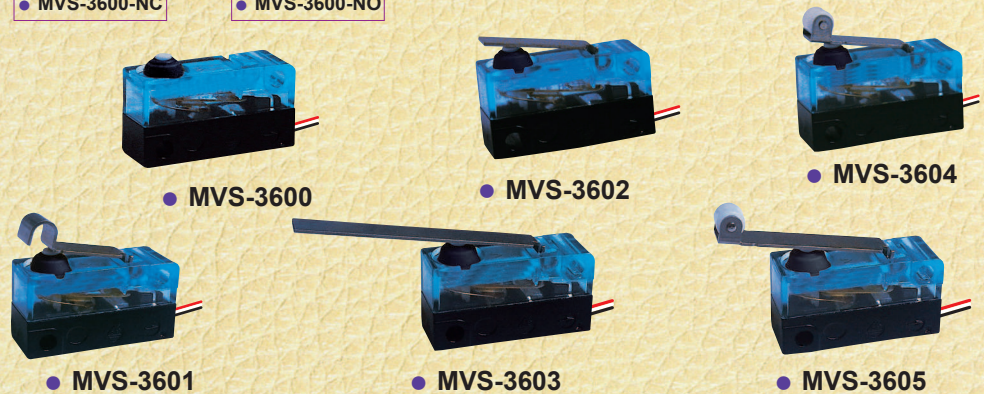

► Product Codes For Watertight Micro Switch MVS-3600 Series 成品編碼

Code Definition 編碼定義

Series 系列

IP 67 Type

Actuator options 動作配件選擇

- 00 = Pushbutton 按鈕型
- 01 = Dummy Roller lever 勾狀搖柄
- 02 = Plain lever, short 短搖柄
- 03 = Plain lever, long 長搖柄
- 04 = Roller lever, short 短輪搖柄
- 05 = Roller lever, long 長輪搖柄


□ = Blank 空白 = 1NC+1NO (3 wires) Standard 標準型

NO = Normally open contacts (2 wires) 常開


NC = Normally close contacts (2 wires) 常閉




DIMENSIONS (mm)
OPERATING CHARACTERISTICS

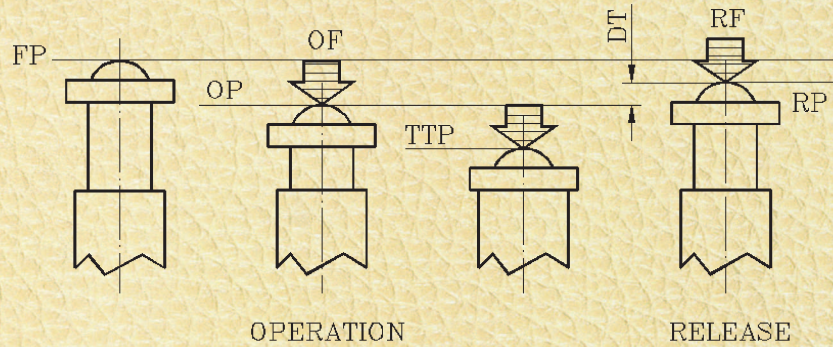


• MVS-3600

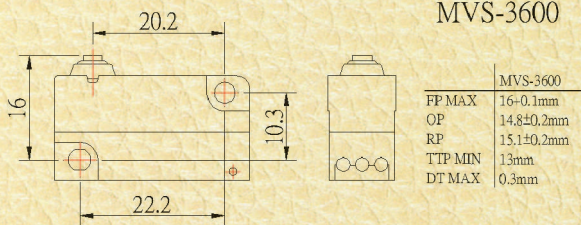


• MVS-3601

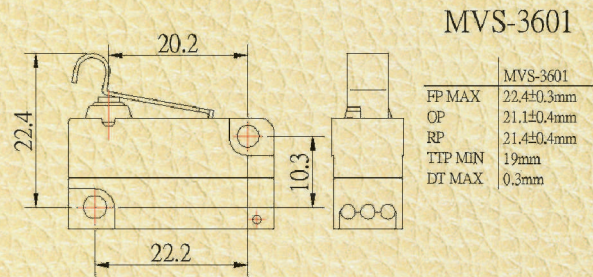


• MVS-3602

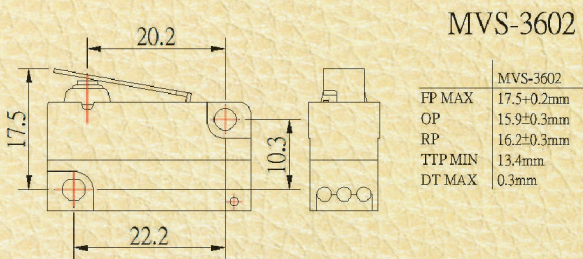

• MVS-3603

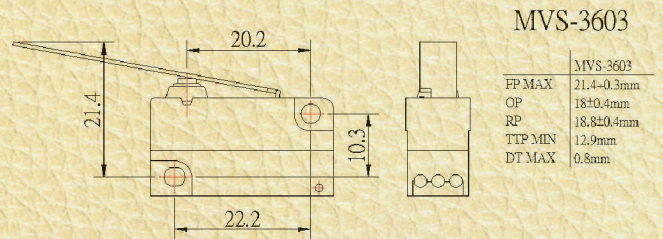

• MVS-3604

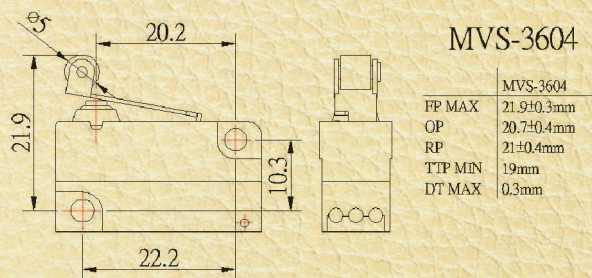

• MVS-3605

