
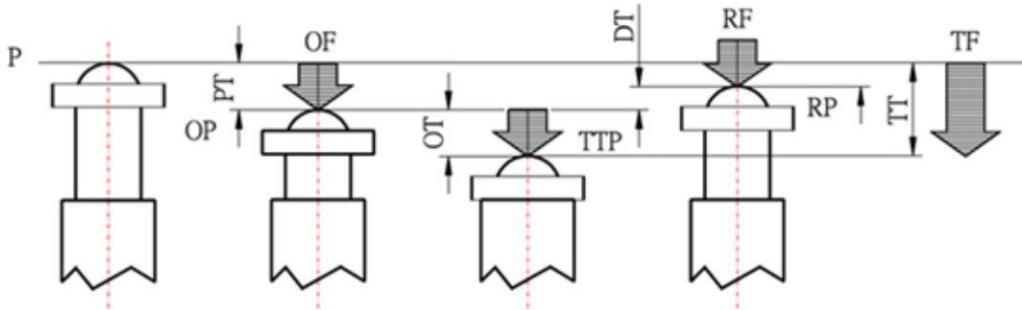


● **MJ1-6104**

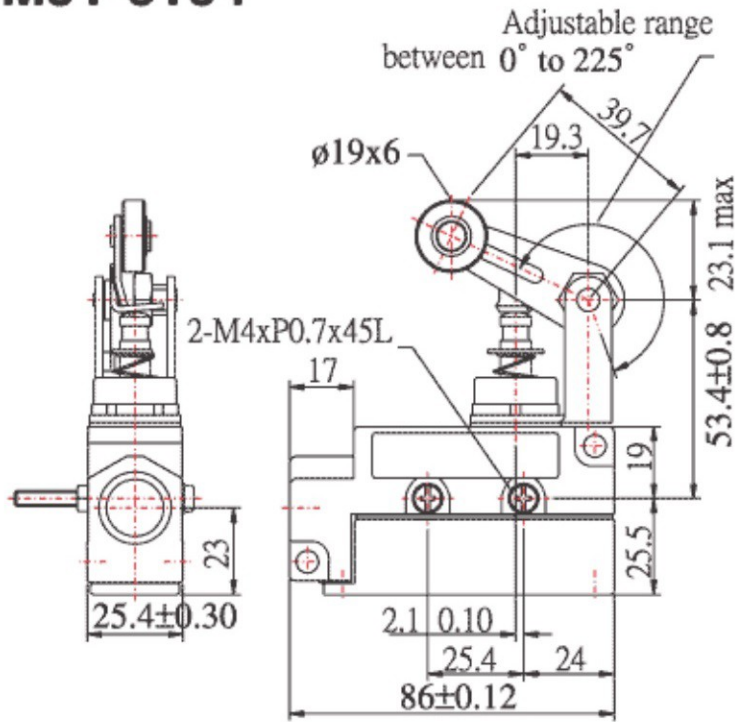

Characteristics:

| | |
|-----------------------------|-------|
| OF: Operating Force Max | 570g |
| RF: Release Force Min | 170g |
| PT: Pretravel Max | 4mm |
| OT: Over Travel Min | 6mm |
| DT: Differential Travel Max | 0.4mm |
| TT: Total Travel Min | - |

Ratings:

| | |
|--------|------------|
| 15A | 125V, 250V |
| 1/8 HP | 125V AC |
| 1/4 HP | 250V AC |
| 1/2 HP | 125V DC |
| 1/4 HP | 250V DC |

